

NUTRI-PLACER 930 & 940 PULL-TYPE NH₃ APPLICATORS



NUTRI-PLACER[®] 930 & 940

PULL-TYPE NH₃ APPLICATORS







NUTRI-PLACER 930 & 940 PULL-TYPE NH₃ APPLICATORS

2 Models | Working Widths From 27.5 to 65 Feet

PROVEN GROUND ENGAGING COMPONENTS FOR OPTIMAL NH₃ PLACEMENT.

Nutri-Placer 930 and 940 pull-type nutrient applicators are designed to improve the productivity of every pass. Built to the standard of professional producers and commercial applications, the Nutri-Placer family is made for high-speed, minimal soil disturbance and precise nutrient management so you can cover more acres in a day.

High Efficiency Farming	4-5
Improved Productivity.	6-7
High-speed Low Disturbance Coulter	8-9
Your Toolbar, Your Way	10-11
Nutri-Placer 930 Specifications	12-13
Nutri-Placer 940 Specifications	14-15

BUILT FOR HIGH EFFICIENCY FARMING.

With three row unit options, commercial quality frame and 15-, 20- and 30-inch spacing options, the rugged toolbar of the Nutri-Placer 930 and 940 can be tailored specifically to your farm or business.



NUTRI-PLACER 930.

- Single fold or double fold transport modes
 - 27.5, 32.5 and 37.5 feet – single fold
 - 42.5 and 47.5 feet – double fold
- The front pull hitch features 4 × 10-inch tubes with 3/8-inch wall thickness
- 4 × 8-inch cross/support tubes with a 5/16-inch wall thickness provides high toolbar durability
- CAT III, IV or V front hitch clevises to match tractor pin size
- Toolbar fore/aft levelness quickly adjusted by adjusting front clevis position
- Available in pre-plant or side-dressing configurations

NUTRI-PLACER 940.


- Double fold or triple fold transport modes
 - 50 feet – double fold
 - 60 and 65 feet – triple fold
- Excellent transport widths – Up to 65' width that transport at 18 ft. 9 in. (5.7 m) wide
- Welded cross/support tubes add strength and stability
- Three ranks of tubing run the width of the toolbar for increased strength. Staggered coulters and row units provide better residue flow
- Simple and reliable fore/aft leveling with a front hitch mounted turnbuckle
- T-bone style front hitch provides tight turning radius

930 & 940 COMMON SPECS.


- Shank models available in 15-, 20-inch (930 only) or 30-inch row spacing
- Steel bridge construction sets the industry standard for durability
- Our welded bridge construction results in a stronger frame
- Rounded gussets provide increased toolbar strength
- Three ranks of tubing add strength and stability to the row unit. This also gives you the flexibility to stagger coulters and row units for improved crop residue flow and faster operating speeds



ACRES PER HOUR CHART

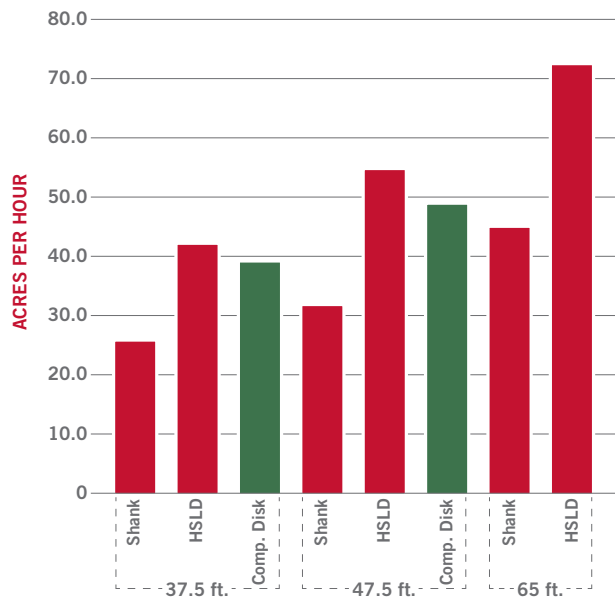

HP REQUIREMENTS CHART

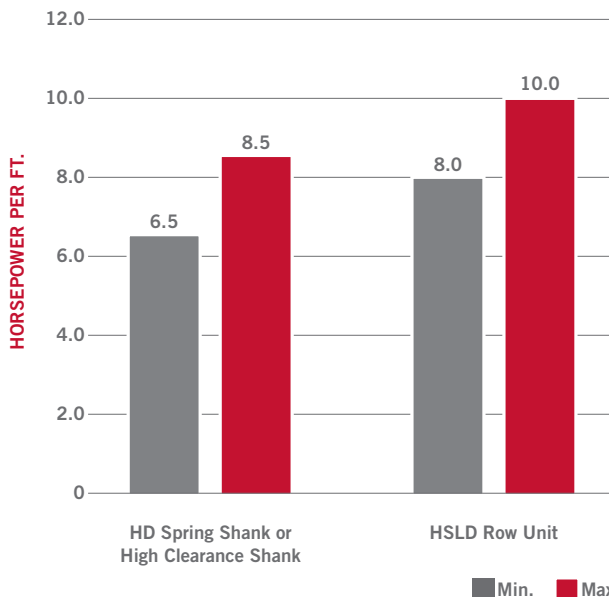

RIGHT PLACE, RIGHT TIME.

- Proud partner of the 4R Nutrient Stewardship initiative
- Promotes best management practices to achieve cropping system goals while minimizing field-nutrient loss and maximizing crop update
- The Nutri-Placer 930 and 940 embody the 4R approach to nutrient stewardship by:
 - Applying the right fertilizer source
 - At the right rate
 - At the right time
 - In the right place



INCREASE PLANT FOOD AVAILABILITY.

The Nutri-Placer 930 and 940 shank and sealer options feature the durability, productivity and agronomic performance you can depend on to make the most of every acre, every application.



1 IN. × 2 IN. SHANK.

- HD spring shank
 - Single 850 lb. spring mount
 - Auto reset design for knife, shank and toolbar protection
 - 1-in. × 2-in. shank
 - Side-mounted knife
 - Available on both the Nutri-Placer 930 and 940 models
- Rigid mount shank
 - 1-in. × 2-in. shank
 - Effective and value option for conditions without rocks
- C-S rigid or spring mount shank
 - 20-in. coulter for a compact design
 - 1-in. × 2-in. shank
 - Side mount knife design

HIGH CLEARANCE SHANK (HCS).

- HCS (High Clearance Shank) mount designed for the toughest field conditions
- 1 1/4 × 2-inch edge-bent shank
- Features sealer mounting holes for accurate and consistent sealer positioning
- Auto-reset design for added protection for the knife, shank assembly and toolbar
- Holding force adjustable to either 850 lb. or 1,250 lb.
- Center mounted knife with shear protection
- High, under frame clearance for residue flow



A COULTER THAT MAKES THE CUT.

- Large, 24-inch coulters slice through tough residue, leading the way for the shank and knife to accurately place valuable nutrients
- Mounting and a set-screw design lock in depth settings
- The spring coulters swivel to meet field conditions

SEAL WITH CONFIDENCE.

- 14-in. or 18-in. reversible spring double disk sealers available on 1 in. x 2 in. shank
- Durable and versatile sealers that offer two disk blade mounting options for use with the 1-in. x 2-in. shank options
 - The standard position offers more aggressive sealing
 - The reversed position leaves more residue on the surface while directing loose soil over the knife slot
- Extra spring down pressure reduces sealer bouncing and the durable H-frame allows for numerous mounting positions
- 1/2-in. x 2 1/2-in. steel arms retain position in rugged field conditions

HEAVY-DUTY SEALING.

- 18-in. reversible spring double disk sealers on HCS shank
- Heavy-duty version of the 14-in. sealer is built stronger to handle the larger blades
- Notched or dull blades available for both the 1-in. x 2-in. shank or HCS shank options
- Added spring pressure provides the needed down pressure for smooth even sealing of the slot
- Heavier 1 in. diameter hardened bushing pivot

MAXIMUM PRODUCTIVITY, MINIMAL SOIL DISTURBANCE.

Capable of speeds up to 11 mph, the High-speed Low Disturbance (HSLD) coulters option helps you cover acres fast and efficiently. In field testing, the HSLD coulters provided better residue cover and a more level surface finish than other coulters-style applicators available — properly sealing nutrients to lock in each crop's profit potential.



WHERE PRODUCTIVITY MEETS PERFORMANCE.


- The Nutri-Placer HSLD places nutrients up to 6 inches deep in the root zone—when and where crops need it most
- New 22.6-inch single coulters cuts through residue with minimal soil disturbance for improved nutrient retention
- Industry's highest speed capability provides increased acres per hour, lower tractor hours and reduced fuel consumption
- Cast-iron components and reduced maintenance keep you in the field.

CREATE THE PERFECT FIELD FINISH.

- Cuts through heavy residue without plugging — even at high speeds and in tough, fast-changing conditions
- In Case IH field testing, the Nutri-Placer HSLD provided better residue cover, significantly fewer clods and reduced lateral soil movement compared with competitive coulters-style applicators
- Uniform surface finish preserves valuable ground cover in highly erodible land and heavy, no-till corn conditions
- Improves soil and moisture retention to reduce run-off and maximize crop uptake

LOW SOIL DISTURBANCE.

- Preserves valuable ground cover in highly erodible land and heavy, no-till corn conditions
- Provides the opportunity for fall, preplant or earlier side-dress applications
- In Case IH field tests, preserved greater amounts of residue, reduced lateral soil movement and produced smaller berms compared with the leading coulters-style applicator competition
- Superior field finish increases nutrient uptake, minimizes runoff and delivers higher returns

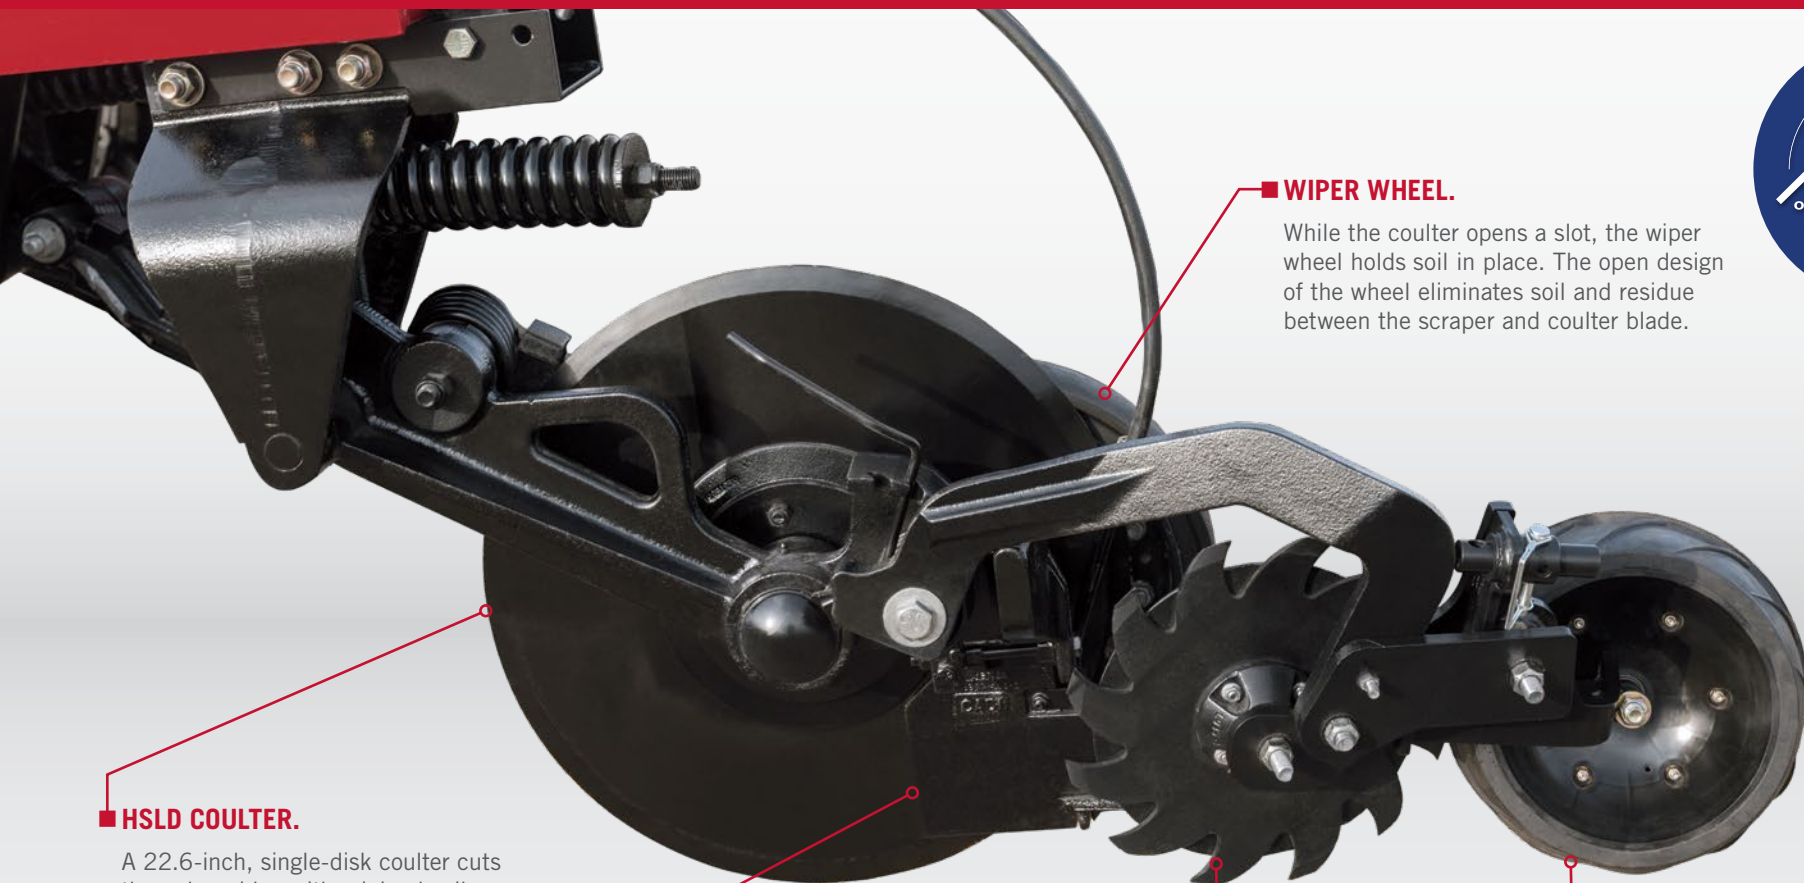

■ **HSLD COULTER.**

A 22.6-inch, single-disk coulters cuts through residue with minimal soil disturbance up to 11 mph. The 4-degree blade angle opens a precise slot for accurate nutrient placement while right and left coulters positioning delivers accuracy down to each individual row.

■ **KNIFE.**

The cast-iron, spring-loaded knife features carbide inserts for wear and protection of fertilizer tubes. A separately replaceable, extra-long Beaver Tail design with tungsten carbide weld aids in sealing.

■ **WIPER WHEEL.**

While the coulters opens a slot, the wiper wheel holds soil in place. The open design of the wheel eliminates soil and residue between the scraper and coulters blade.

■ **CLOSING SYSTEM.**

The SharkTooth® blade and walking tandem press wheel firm the soil as the implement rolls through the field. This system works on a pivot to closely follow the ground contour, minimizing closing disturbance. No-tools-required spring down pressure and pivot range adjustments make changes quick and easy.

*Recognition of the year's top 50 most innovative new agricultural products.

COMMERCIAL GRADE FEATURES THAT KEEP YOU IN THE FIELD LONGER

Made for operations of any size, the Nutri-Placer 930 and 940 toolbars meet the needs of today's high efficiency farming practices



MAXIMUM FLEXIBILITY.

- Excellent ground following capabilities
- Three section flex on Nutri-Placer 930 models
- Five section flex on a Nutri-Placer 940 models
- Simple hydraulic wing fold provides narrow transport for all models up through 65 ft. working widths

HYDRAULIC SINGLE POINT DEPTH CONTROL.

- Provides quick and easy depth adjustments and is standard on all Nutri-Placer 930 and 940 models
- Adjustment handle in center of the main frame with decal to advise turns
- Depth adjustment across entire toolbar width
 - Turn handle clockwise for deeper depth
 - Turn handle counterclockwise for shallower depth
- Independent and tool-less adjusted leveling control for inner and outer wing gauge wheels provides greater simplicity and durability

CONSTANT LEVEL REAR HITCH.

- Optional on all Nutri-Placer 930 and 940 units
- Rear hitch swings and can be extended out in order to facilitate hitching a tank for simple hook-up
- 25,000 lb. (11,340 lb.) hitch towing capacity due to the strong 5×5×5/16 inch tubing that extends up to the torque tube and mainframe support tubes
- Replaceable poly wear pads on the support/contact points of the hitch allow the hitch to easily move side to side and front to back when needed
- 1 1/4×4 inch thick hitch bar



SMOOTH RIDE AT HIGHER SPEEDS.

- Bias Ply tires standard on applicators equipped with shanks; Stubble Resistant, high flotation radial tires optional
- Stubble-resistant, high flotation radial tires standard on all HSLD units
- Walking tandems on both mainframe and wings move independently and maintain contact with the ground, providing a smoother ride
- Single wheels available for side dress applications

LED LIGHTING.

- Provides bright, reliable, and safe transport
- Amber warning lights mounted to the front
- Red rear brake lights are found at the rear of the mainframe

STABILIZER WHEELS.

- Double fold models feature frame mounted gauge wheels for smooth operation
- Quickly adjust position with a few turns of the handle
- Hold the gauge wheel in position with the large pin



NUTRI-PLACER 930 PULL-TYPE FERTILIZER

Available on a rugged 4-by-6-foot frame and in five widths ranging from 27.5 to 47.5 feet, the Nutri-Placer 930 has proven ground-engaging components for optimal anhydrous ammonia placement. From the hydraulic single-point depth control to double fold wing cylinders and radial tires, the Nutri-Placer 930 easily moves from field to field, helping you cover more acres efficiently.

NUTRI-PLACER	930 SERIES				
MODEL	27.5 FT. (8.4 M)	32.5 FT. (9.9 M)	37.5 FT. (11.4 M)	42.5 FT (12.2 M)	47.5 FT (14.5 M)
Frame Style	Pull-type				
Row Spacing (Shank)	15 in., 20 in., or 30 in.				
Row Spacing (HSLD)	30 in. (76 cm)				
Main Frame & Wing Tubing	4 in. × 6 in. double-rank (10 cm × 15 cm)				
Pull Frame	A-Frame 4 in. × 10 in. tubes (10.1 cm × 25.4 cm)				
Fold Type	Single fold			Double fold	
Transport Height	10 ft. 6 in. (3.2 m)	12 ft. 4 in. (3.7 m)	13 ft. 10 in. (4.2 m)	13 ft. 6 in. (4.1 m)	
Transport Width	16 ft. 10 in. (5.1 m)			18 ft. 6 in. (5.6 m)	
Main Transport Wheels (Shank)	Standard single – 12.5L × 15 FI (8-bolt); Optional single – 320/70R15 radial (8-bolt); Optional walking tandem – 11L × 15 FI (6-bolt); Optional walking tandem – 280/70R15 (6-bolt)			Standard single – 340/60R16.5 (8-bolt); Optional walking tandem – 12.5L × 15FI (8-bolt); Optional walking tandem – 320/70R15 radial (8-bolt)	Standard walking tandem – 12.5L × 15FI (8-bolt); Optional walking tandem – 320/70R15 radial (8-bolt)
Wing Wheels (Shank)	Standard Single – 9.5L × 15 FI (6 bolt); Optional single – 320/70R15 radial (8-bolt) Optional walking tandem – 9.5L × 15 FI (6-bolt); Optional walking tandem – 280/70R15 (6-bolt)			Standard single – 280/70R15 radial (6-bolt); Optional walking tandem – 9.5L × 15 FI (6-bolt); Optional walking tandem – 280/70R15 radial (6-bolt)	Standard walking tandem – 9.5L × 15 FI (6-bolt); Optional walking tandem – 280/70R15 radial (6-bolt)
Main Transport Wheels (HSLD)	Standard single 320/70R15 radial (8-bolt); Optional walking tandem 280/70R15 radial (6-bolt)			Standard Walking Tandem 320/70R15 Radial (6-bolt)	
Wing Wheels (HSLD)	Standard single 280/70R15 radial (6-bolt); Optional walking tandem 280/70R15 radial (6-bolt)			Standard Walking Tandem 280/70R15 Radial (6-bolt)	
Outer Gauge Wheel	None				Pin Adjust Qty. 2 – 9.5L × 15 stubble-resistant FI tires
Hitch	Category 3 clevis		Category 3 clevis (opt. cat. 4)	Category 4 clevis (opt. cat. 5)	
Wing Flex	3 Section flex (7° Down & 16° Up)				
Engine HP Requirement (Shank)	165 – 220 HP	195 – 260 HP	225 – 300 HP	255 – 340 HP	285 – 380 HP
Engine HP Requirement (HSLD)	220 – 275 HP	260 – 325 HP	300 – 375 HP	340 – 425 HP	380 – 475 HP
Operating Speed (Shank)	5 – 7 mph (8.0 – 11.3 kph)				
Operating Speed (HSLD)	6 – 11 mph (9.7 – 17.7 kph)				
Depth Adjustment	Single-point hydraulic				
Wheel Pivot Lubrication	Composite self-lubricating bushing				
Hinge Lubrication	Composite self-lubricating bushing				
Shank Options	Rigid Mtd., HD Spring Mtd., Rigid CS, HD Spring CS, or High Clearance Shank (HCS)				
Coulter Options (Shank)	20 in. (51 cm) coulters, 24 in. (61 cm) coulters				
Sealer Options (Shank)	14 in. (36 cm) spring double disk, 18 in. (46 cm) spring double disk-notched, 18 in. (46 cm) spring double disk-dull				
Rear Hitch	Optional constant level rear hitch 25,000 lb. (11 340 kg) towing capacity				
HSLD Row Unit	22.6-inch (57.4 cm) coulter; 4-degree blade angle; Cast-iron knife with carbide inserts; Walking tandem closing system with SharkTooth blade and press wheel				
Weight (Shank)	10,200 lb. (4 627 kg)	11,200 lb. (5 080 kg)	14,200 lb. (6 441 kg)	15,200 lb. (6 895 kg)	16,600 lb. (7 530 kg)
Weight (HSLD)	10,500 lb. (4 763 kg)	12,500 lb. (5 670 kg)	14,500 lb. (6 577 kg)	15,500 lb. (7 031 kg)	17,000 lb. (7 711 kg)



NUTRI-PLACER 940 PULL-TYPE FERTILIZER

The Nutri-Placer 940 allows you to take control of your nitrogen application. These tough, durable applicators offer commercial quality 6-by-6-inch frames available in five widths ranging from 50 to 65 feet. Single-point depth control and a constant level rear hitch provide safe, reliable hook-up. You also get to choose from a variety of agronomically designed coulter or shank and sealer options to deliver uniform depth and sealing.

NUTRI-PLACER	940 SERIES		
MODEL	50 FT. (15.2 M)	60 FT. (18.3 M)	65 FT. (19.8 M)
Frame Style	Pull-type		
Row Spacing (Shank)	15 in. (938 cm) or 30 in. (76 cm)		
Row Spacing (HSLD)	30 in. (76 cm)		
Main Frame & Wing Tubing	6 in. × 6 in. triple-rank (15 cm × 15 cm)		
Pull Frame	T-Bone 6 in. × 10 in. tubes (15.24 cm × 25.4 cm)		
Fold Type	5 Section fold, 3 section flex	7 Section fold, 5 section flex	7 Section fold, 5 section flex
Transport Height	13 ft. 9 in. (4.2 m)		
Transport Width	18 ft. 9 in. (5.7 m)		
Main Transport Wheels (Shank)	Standard walking tandem – 16.1L × 16.1FI (8-bolt); Optional walking tandem – 440/55R18 radial (8-bolt)		
Wing Wheels (Shank)	Standard walking tandem – 12.5L × 15FI (6-bolt); Optional walking tandem – 320/70R15 radial (6-bolt)		
Main Transport Wheels (HSLD)	Standard walking tandem – 440/55R18 radial (8-bolt)		
Wing Wheels (HSLD)	Standard walking tandem – 320/70R15 radial (6-bolt)		
Wing Gauge Wheel (Shank)	None		Pin adjust 20.5–8 load range D (Outer wings only)
Wing Gauge Wheel (HSLD)	None	Pin adjust 20.5–8 load range D (inner & outer wings)	
Hitch	Category IV/V		Category IV/V
Wing Flex	5 Section flex (inner wings – 20 degrees up & 9 degrees down; outer wings – 7 degrees up and down)		
Engine HP Requirement (Shank)	300–460 HP	360–550 HP	390–598 HP
Engine HP Requirement (HSLD)	315–500 HP	375–600 HP	405–650 HP
Operating Speed (Shank)	5–8 mph (8.0–12.9 kph)		
Operating Speed (HSLD)	6–11 mph (9.7–17.7 kph)		
Depth Adjustment	Single-point hydraulic		
Wheel Pivot Lubrication	Composite self-lubricating bushing		
Hinge Lubrication	Composite self-lubricating bushing		
Coulter Options	24 in. (61 cm) coulters		
Shank Options	HD Spring Mounted or High Clearance Shank (HCS)		
HSLD Row Unit	22.6-inch (57.4 cm) coulter; 4-degree blade angle; Cast-iron knife with carbide inserts; Walking tandem closing system with SharkTooth blade and press wheel		
Sealer Options	18 in. (46 cm) Spring double disk-notched, 18 in. (46 cm) Spring double disk–dull		
Weight (Shank)	21,150 lb. (9752 kg)	22,500 lb. (10206 kg)	23,000 lb. (10433 kg)
Weight (HSLD)	23,600 lb. (10705 kg)	26,800 lb. (12156 kg)	28,000 lb. (12700 kg)
Rear Hitch	Optional constant level rear hitch 25,000 lb. (11340 kg) towing capacity		



SAFETY NEVER HURTS!™ Always read the Operators Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. CNH Industrial America LLC reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice. Availability of some models and equipment builds varies according to the country in which the equipment is used.

©2018 CNH Industrial America LLC. All rights reserved. Case IH is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC, are the property of those respective companies. Printed in U.S.A. www.caseih.com CIH17110202